




Materiale: Acciaio Zincato / Acciaio Inox



1 Cuscinetto schermato

1 Ball bearing | 1 Roulement | 1 Rodamiento

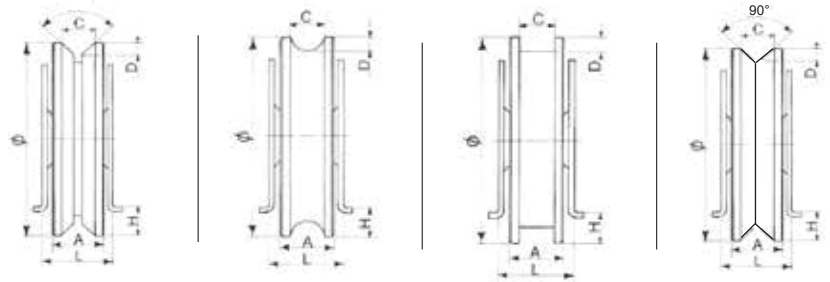

Galvanized steel wheel with open bracket

Galet en acier zingué avec support ouvert

Rueda en acero cincado con soporte abierto

Колесо с открытым суппортом с внутренне опорой V

Schiebetore Rolle aus verzinktem Stahl mit geöffneter Stützplatte und einem Kugellager

N.B. Per ordinare la versione Cataforesi aggiungere la lettera "C" alla fine del codice Es: 111/5/17/C.

Le versioni nylon sono indicate con la lettera "N" finale

To order the Cataphoresis model, add "C" at the end of the code. Ex.: 110/5/17/C

The nylon versions are indicated with the final letter "N"

INOX

NYLON



| Art. | Ø | A | C | D | H | L | Peso(g) | Conf. |
|------------|-----|----|----|-----|-----|----|-----------|-------|
| - | - | - | - | - | - | - | Weight(g) | Pack |
| 130/6/17 | 60 | 17 | 10 | 4 | 8,5 | 25 | 290 | 24 |
| 130/8/20 | 80 | 20 | 13 | 4 | 12 | 33 | 800 | 20 |
| 130/9/20 | 90 | 20 | 13 | 4 | 17 | 33 | 1.000 | 12 |
| 130/10/20 | 100 | 20 | 13 | 4 | 22 | 33 | 1.200 | 12 |
| 130/12/20 | 120 | 20 | 13 | 4 | 18 | 33 | 2.070 | 8 |
| 130/14/20 | 140 | 20 | 13 | 4 | 28 | 33 | 2.650 | 6 |
| 130/8/25 | 80 | 25 | 20 | 7,5 | 12 | 33 | 840 | 20 |
| 130/10/25 | 100 | 25 | 20 | 7,5 | 22 | 33 | 1.300 | 12 |
| 130/12/25 | 120 | 25 | 20 | 7,5 | 18 | 33 | 2.200 | 8 |
| 130/14/25 | 140 | 25 | 20 | 7,5 | 28 | 33 | 2.900 | 6 |
| 1130/8/20 | 80 | 20 | 13 | 4 | 12 | 33 | 800 | 12 |
| 1130/10/20 | 100 | 20 | 13 | 4 | 22 | 33 | 1.200 | 12 |

| Art. | Ø | A | C | D | H | L | Peso(g) | Conf. |
|-------------|-----|----|-----|-----|-----|----|-----------|-------|
| - | - | - | - | - | - | - | Weight(g) | Pack |
| 131/6/17 | 60 | 17 | 9,5 | 6,5 | 8,5 | 25 | 260 | 24 |
| 131/8/20 | 80 | 20 | 16 | 8 | 12 | 33 | 780 | 20 |
| 131/9/20 | 90 | 20 | 16 | 8 | 17 | 33 | 980 | 12 |
| 131/10/20 | 100 | 20 | 16 | 8 | 22 | 33 | 1.190 | 12 |
| 131/12/20 | 120 | 20 | 16 | 8 | 18 | 33 | 2.000 | 8 |
| 131/14/20 | 140 | 20 | 16 | 8 | 28 | 33 | 2.600 | 6 |
| 131/8/25 | 80 | 25 | 20 | 10 | 12 | 33 | 750 | 20 |
| 131/10/25 | 100 | 25 | 20 | 10 | 22 | 33 | 1.210 | 12 |
| 131/12/25 | 120 | 25 | 20 | 10 | 18 | 33 | 2.120 | 8 |
| 131/14/25 | 140 | 25 | 20 | 10 | 28 | 33 | 2.460 | 6 |
| 1131/8/20 | 80 | 20 | 12 | 8 | 12 | 33 | 780 | 20 |
| 1130/10/20 | 100 | 20 | 12 | 8 | 22 | 33 | 1.190 | 12 |
| 131/8/25/N | 80 | 25 | 20 | 10 | 12 | 33 | 780 | 20 |
| 131/9/25/N | 90 | 25 | 20 | 10 | 22 | 33 | 1.000 | 12 |
| 131/10/25/N | 100 | 25 | 20 | 10 | 18 | 33 | 1.250 | 12 |

N.B. Per ordinare la versione Cataforesi aggiungere la lettera "C" alla fine del codice Es: 111/5/17/C.

Le versioni nylon sono indicate con la lettera "N" finale

To order the Cataphoresis model, add "C" at the end of the code. Ex.: 110/5/17/C

The nylon versions are indicated with the final letter "N"

INOX  NYLON 




| Art. | Ø | A | C | D | H | L | Peso(g) | Conf. |
|------------|-----|----|----|-----|-----|----|-----------|-------|
| - | - | - | - | - | - | - | Weight(g) | Pack |
| 137/6/17 | 60 | 17 | 10 | 5,5 | 8,5 | 25 | 290 | 24 |
| 137/8/20 | 80 | 20 | 13 | 6,5 | 12 | 33 | 800 | 20 |
| 137/9/20 | 90 | 20 | 13 | 6,5 | 17 | 33 | 1.000 | 12 |
| 137/10/20 | 100 | 20 | 13 | 6,5 | 22 | 33 | 1.200 | 12 |
| 137/12/20 | 120 | 20 | 13 | 6,5 | 18 | 33 | 2.070 | 8 |
| 137/14/20 | 140 | 20 | 13 | 6,5 | 28 | 33 | 2.650 | 6 |
| 1370/8/25 | 80 | 25 | 20 | 10 | 12 | 33 | 840 | 20 |
| 137/10/25 | 100 | 25 | 20 | 10 | 22 | 33 | 1.300 | 12 |
| 137/12/25 | 120 | 25 | 20 | 10 | 18 | 33 | 2.200 | 8 |
| 137/14/25 | 140 | 25 | 20 | 10 | 28 | 33 | 2.900 | 6 |
| 1137/8/20 | 80 | 20 | 13 | 6,5 | 12 | 33 | 800 | 20 |
| 1137/10/20 | 100 | 20 | 13 | 6,5 | 22 | 33 | 1.200 | 12 |



| Art. | Ø | A | C | D | H | L | Peso(g) | Conf. |
|-----------|-----|----|----|-----|-----|----|-----------|-------|
| - | - | - | - | - | - | - | Weight(g) | Pack |
| 132/6/17 | 60 | 17 | 8 | 4,5 | 8,5 | 25 | 260 | 24 |
| 132/8/20 | 80 | 20 | 12 | 6,5 | 12 | 33 | 780 | 20 |
| 132/9/20 | 90 | 20 | 12 | 6,5 | 17 | 33 | 980 | 12 |
| 132/10/20 | 100 | 20 | 12 | 6,5 | 22 | 33 | 1.190 | 12 |
| 132/12/20 | 120 | 20 | 12 | 6,5 | 18 | 33 | 2.000 | 8 |
| 132/14/20 | 140 | 20 | 12 | 6,5 | 28 | 33 | 2.600 | 6 |

Profilato scatolato cancello

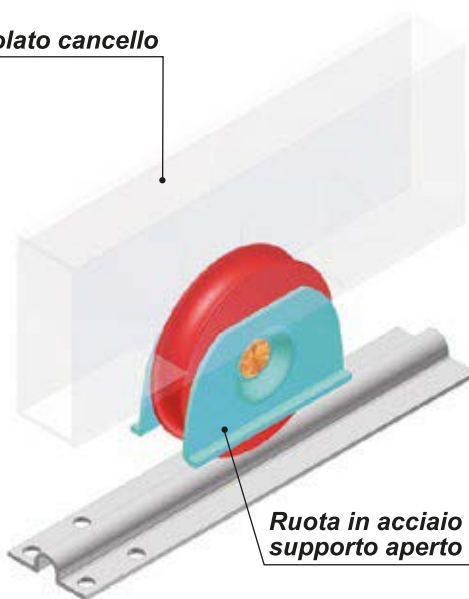

Ruota in acciaio zincato con supporto aperto